


## Tubosa Genova cilinder slim PARPLAF 100/45 E27 matte white

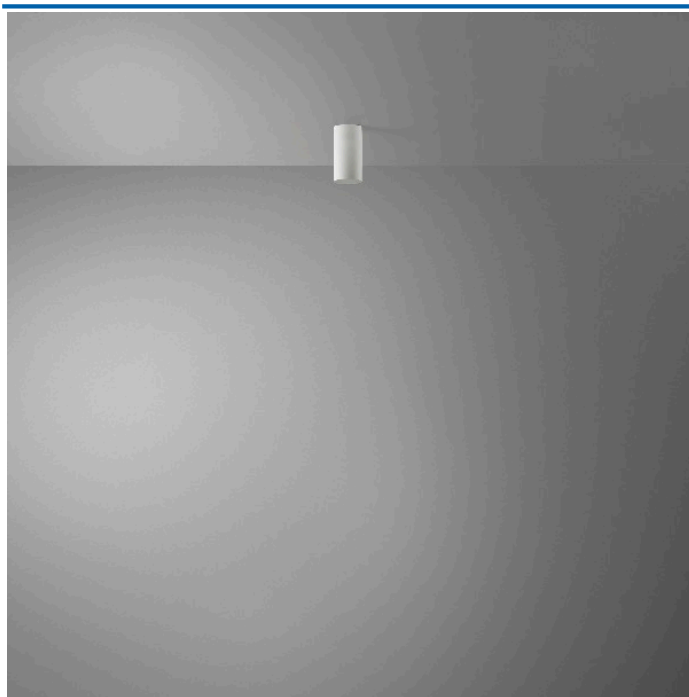

Tubosa Genova cilinder slim PARPLAF 100/45 E27 matte white

ARTICLE\_NUMBER: 590006.00A

CHANGED\_LAST: 16-09-2025

BRAND: Daylight Italia

ETIM\_GROUP: EG000027 - Luminaires

ETIM\_CLASS: EC002892 - Ceiling-/wall luminaire

SYNONYM: Bed lighting luminaire, Bed wall luminaire, Bulleye, Ceiling and wall luminaire, Ceiling- and wall luminaire, Ceiling-/wall luminaire, Downlighter, Facade luminaire, FL luminaire



## FEATURES

Protection class according to IEC 61140: --	Total harmonic distortion: --
Width: --	Photobiological safety according to EN 62471: --
Outer diameter: --	Degree of protection (NEMA): --
Lamp holder: --	Rated ambient temperature according to IEC 62722-2-1: --
Conductor cross section: --	Filament test according to IEC 60695-2-11: --
Connection type: --	Dimming 0-10 V: --
Housing colour: --	Dimming 1-10 V: --
Dimmable: --	Dimming DALI: --
Voltage type: --	Dimming DMX: --
With movement sensor: --	Dimming potentiometer (integrated): --
Suitable for lamp power: --	Dimming LineSwitch: --
Type of grid: --	Dimming manufacturer's proprietary system: --
Type of control gear: --	Dimming mains voltage modulation: --
Colour rendering index CRI: --	Dimming phase cut-off (trailing edge): --
Suitable for wall mounting: --	Dimming phase cut-on (leading edge): --
Built-in width: --	Dimming programmable: --
Built-in diameter: --	Dimming RF: --
With switch: --	Dimming Sine Wave Reduction: --
With light sensor: --	Dimming Touch and Dim: --
Suitable for suspended mounting: --	Dimming Zigbee: --
Luminous intensity: --	Dimming with push-button: --
Number of poles: --	No dim function: --
Length: --	Light distributor: --
Height/depth: --	Luminaire efficacy: --
Housing material: --	Dimming DSI: --
Lamp type: --	Unified Glare Ratio (UGR): --
With presence detector: --	Operation by Bluetooth: --
Degree of protection (IP), front side: --	Compatible with Apple HomeKit: --
Built-in length: --	Compatible with Google Assistant: --
Suitable for light line configuration: --	Compatible with Amazon Alexa: --
Suitable for emergency lighting: --	Max. number of luminaires per miniature circuit breaker C16 (MCB): --
Light outlet: --	Max. number of luminaires per miniature circuit breaker B16 (MCB): --
Light distribution: --	Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq): --
Material cover: --	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq): --
Impact strength: --	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq): --
Nominal voltage: --	Failure rate at median useful life of 35,000 h at 25 °C ambient (tq): --
Emergency power supply integrated: --	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq): --
Degree of protection (IP): --	Failure rate at median useful life of 75,000 h at 25 °C ambient (tq): --
With light source: --	Dimming DALI-2: --
With mounting material: --	Flickering value Pst LM: --
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24: --	Stroboscope effect value SVM: --
Covering of the luminaire with thermally insulating material possible: --	Colour of light adjustable: --
Suitable for number of light sources: --	Luminous flux adjustable: --
Suitable for built-in mounting: --	Beam angle adjustable: --

With control gear: --	Exchangeable control gear: --
Suitable for workplace according to EN 12464-1: --	Compatible with Casambi: --
Suitable for surface mounting: --	Energy efficiency class of the light source according to EU regulation 2019/2015: --
Beam angle: --	Luminous intensity: --
Connectable conductor cross section: --	Degree of protection (IP), rear side: --
Luminous flux in emergency mode: --	Movement sensor/presence detector technology: --
Nominal current: --	Luminaire efficacy: --
Colour temperature: --	Rated luminous flux according to IEC 62722-2-1: --
Max. system power: --	Emergency power supply system: --
Rated luminous flux according to IEC 62722-2-1: --	Power consumption in emergency mode: --
Colour of light: --	Emergency function monitoring system: --
With air slots: --	Containing product according to 2019/2020/EU: --
Suitable for clamp-mounting: --	Total harmonic distortion (THD): --
Constant light output (CLO): --	Max. number of luminaires per miniature circuit breaker C10 (MCB): --
IFTTT support available: --	Suitable for ceiling mounting: --
Type of wiring: --	Built-in height/depth: --
Rated lifetime L70/B50 at 25 °C: --	Surface protection housing: --
Rated lifetime L80/B50 at 25 °C: --	Power factor: --
Colour consistency (McAdam ellipse): --	Meets min. EIA service life criterion L90 (at 50,000 hours at tq = 25°C): --

## PACKING\_INFORMATION

PACKING_CODE	BX
PACKING_FORM	Box <p>A non-specific term that refers to a non-flexible, three-dimensional packaging with closed sides that can be completely enveloped and made of any material. Although some boxes are suitable for reuse or rescue, they can also be for one-off use, depending on the product</p>
STATISTICS	94051900

