


Tubosa track light adjustable H150/55 GU10 matte white RAL 9003



Tubosa track light adjustable H150/55 GU10 matte white RAL 9003

ARTICLE_NUMBER:	590075.00A
CHANGED_LAST:	16-09-2025
BRAND:	Daylight Italia
ETIM_GROUP:	EG000027 - Luminaires
ETIM_CLASS:	EC001744 - Downlight/spot/floodlight
SYNONYM:	Building site lighting luminaire, Downlight, Downlight/spot/floodlight, Floodlight, Light-track luminaire, Light-track spot, Projector, Spot, Spot luminaire/floodlight

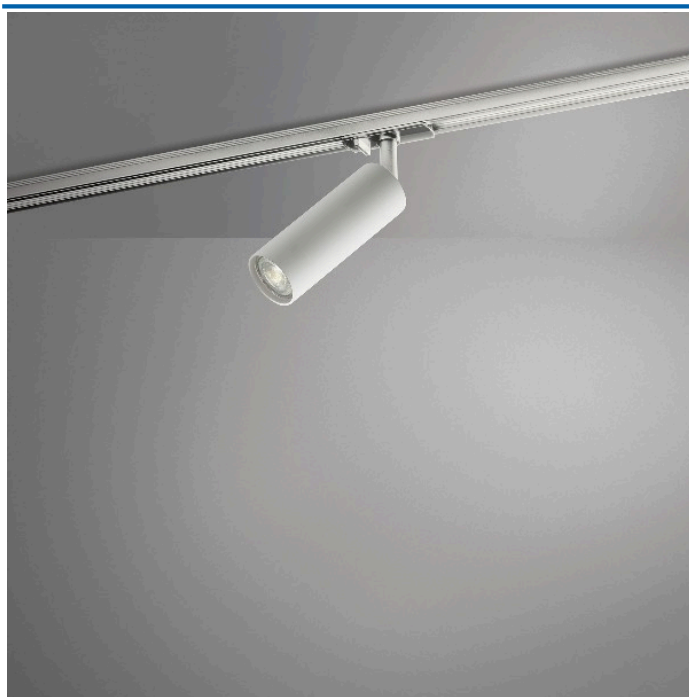

FEATURES

Protection class according to IEC 61140: --	Built-in width: --
Width: --	Colour consistency (McAdam ellipse): --
Outer diameter: --	Total harmonic distortion: --
Reflector: --	Photobiological safety according to EN 62471: --
Lamp holder: --	Degree of protection (NEMA): --
Conductor cross section: --	Rated ambient temperature according to IEC 62722-2-1: --
Connection type: --	Filament test according to IEC 60695-2-11: --
Housing colour: --	Dimming 0-10 V: --
Dimmable: --	Dimming 1-10 V: --
Surface protection: --	Dimming DALI: --
Voltage type: --	Dimming DMX: --
With movement sensor: --	Dimming potentiometer (integrated): --
Suitable for lamp power: --	Dimming LineSwitch: --
Type of control gear: --	Dimming manufacturer's proprietary system: --
Colour rendering index CRI: --	Dimming mains voltage modulation: --
Suitable for wall mounting: --	Dimming phase cut-off (trailing edge): --
Built-in width: --	Dimming phase cut-on (leading edge): --
With light sensor: --	Dimming programmable: --
Suitable for suspended mounting: --	Dimming RF: --
Luminous intensity: --	Dimming Sine Wave Reduction: --
Number of poles: --	Dimming Touch and Dim: --
Length: --	Dimming Zigbee: --
Height/depth: --	Dimming with push-button: --
Housing material: --	No dim function: --
Lamp type: --	Light distributor: --
Reflector colour: --	Luminaire efficacy: --
With presence detector: --	Suitable for low voltage cable system: --
Degree of protection (IP), front side: --	Dimming DSI: --
Built-in length: --	Unified Glare Ratio (UGR): --
Light outlet: --	Operation by Bluetooth: --
Light distribution: --	Compatible with Apple HomeKit: --
Material cover: --	Compatible with Google Assistant: --
Impact strength: --	Compatible with Amazon Alexa: --
Nominal voltage: --	Max. number of luminaires per miniature circuit breaker C16 (MCB): --
Emergency power supply integrated: --	Max. number of luminaires per miniature circuit breaker B16 (MCB): --
Degree of protection (IP): --	Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq): --
With light source: --	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq): --
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24: --	Lumen maintenance at median useful life of 100,000 h at 25 °C ambient (tq): --
Covering of the luminaire with thermally insulating material possible: --	Failure rate at median useful life of 35,000 h at 25 °C ambient (tq): --
Suitable for number of light sources: --	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq): --
Suitable for built-in mounting: --	Failure rate at median useful life of 100,000 h at 25 °C ambient (tq): --
With control gear: --	Dimming DALI-2: --
Suitable for workplace according to EN 12464-1: --	Flickering value Pst LM: --
Suitable for surface mounting: --	Stroboscope effect value SVM: --

Beam angle:	--	Colour of light adjustable:	--
Connectable conductor cross section:	--	Luminous flux adjustable:	--
Surface brushed:	--	Beam angle adjustable:	--
Luminous flux in emergency mode:	--	Exchangeable control gear:	--
Nominal current:	--	Built-in diameter:	--
Colour temperature:	--	Compatible with Casambi:	--
Max. system power:	--	Energy efficiency class of the light source according to EU regulation 2019/2015:	--
Rated luminous flux according to IEC 62722-2-1:	--	Luminous intensity:	--
Colour of light:	--	Degree of protection (IP), rear side:	--
Adjustability:	--	Movement sensor/presence detector technology:	--
Suitable for traverse mounting:	--	Luminaire efficacy:	--
Suitable for pedestal/floor mounting:	--	Rated luminous flux according to IEC 62722-2-1:	--
Suitable for light-track mounting:	--	Emergency power supply system:	--
Suitable for clamp-mounting:	--	Power consumption in emergency mode:	--
Constant light output (CLO):	--	Emergency function monitoring system:	--
Built-in height:	--	Containing product according to 2019/2020/EU:	--
IFTTT support available:	--	Total harmonic distortion (THD):	--
Luminous flux:	--	Suitable for ceiling mounting:	--
Type of wiring:	--	Built-in length:	--
Rated lifetime L70/B50 at 25 °C:	--	Built-in height/depth:	--
Rated lifetime L80/B50 at 25 °C:	--	Power factor:	--

PACKING_INFORMATION

PACKING_CODE	BX
PACKING_FORM	Box <p>A non-specific term that refers to a non-flexible, three-dimensional packaging with closed sides that can be completely enveloped and made of any material. Although some boxes are suitable for reuse or rescue, they can also be for one-off use, depending on the product</p>
STATISTICS	94051900

