


## E27 metal lampshade Disco white + E27 Fil mild G125



E27 metal lampshade Disco white + E27 Fil milk G125

ARTICLE_NUMBER:	810061.00A
CHANGED_LAST:	17-09-2025
BRAND:	Daylightitalia
ETIM_GROUP:	EG000027 - Luminaires
ETIM_CLASS:	EC001743 - Pendant luminaire
SYNONYM:	Grid luminaire, Pendant luminaire, Prisms luminaire, Watertight luminaire

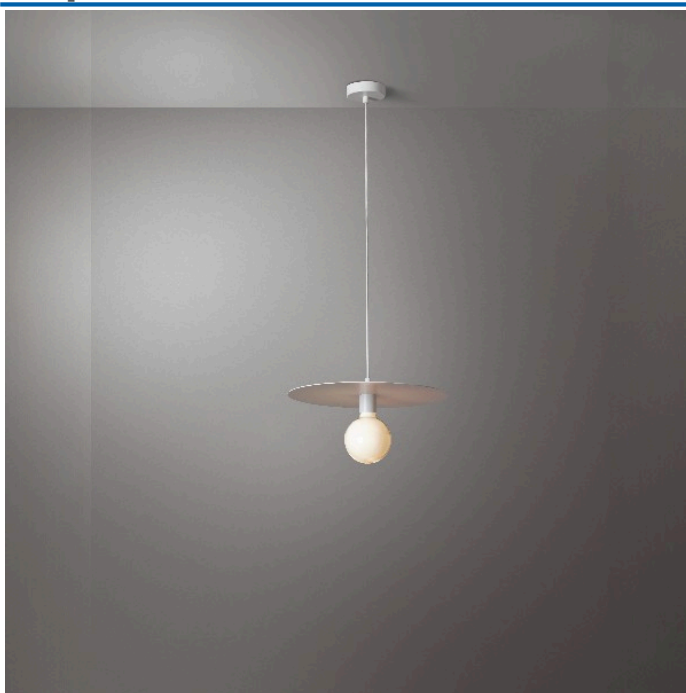

## FEATURES

Protection class according to IEC 61140: --	Degree of protection (NEMA): --
Width: --	Filament test according to IEC 60695-2-11: --
Reflector: --	Dimming 0-10 V: --
Lamp holder: --	Dimming 1-10 V: --
Conductor cross section: --	Dimming DALI: --
Connection type: --	Dimming DMX: --
Housing colour: --	Dimming potentiometer (integrated): --
Dimmable: --	Dimming LineSwitch: --
Voltage type: --	Dimming manufacturer's proprietary system: --
With movement sensor: --	Dimming mains voltage modulation: --
Suitable for lamp power: --	Dimming phase cut-off (trailing edge): --
Type of grid: --	Dimming phase cut-on (leading edge): --
Type of control gear: --	Dimming programmable: --
Colour rendering index CRI: --	Dimming RF: --
Diameter: --	Dimming Sine Wave Reduction: --
With light sensor: --	Dimming Touch and Dim: --
Number of poles: --	Dimming Zigbee: --
Length: --	Dimming with push-button: --
Height/depth: --	No dim function: --
Housing material: --	Light distributor: --
Lamp type: --	Luminaire efficacy: --
With presence detector: --	Dimming DSI: --
Direct-/indirect proportion separately controllable: --	Unified Glare Ratio (UGR): --
Suitable for light line configuration: --	Operation by Bluetooth: --
Suitable for emergency lighting: --	Compatible with Apple HomeKit: --
Light outlet: --	Compatible with Google Assistant: --
Light distribution: --	Compatible with Amazon Alexa: --
Material cover: --	Max. number of luminaires per miniature circuit breaker C16 (MCB): --
Pendant length: --	Max. number of luminaires per miniature circuit breaker B16 (MCB): --
Impact strength: --	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq): --
Nominal voltage: --	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq): --
Emergency power supply integrated: --	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq): --
Degree of protection (IP): --	Failure rate at median useful life of 75,000 h at 25 °C ambient (tq): --
With light source: --	Dimming DALI-2: --
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24: --	Flickering value Pst LM: --
Suitable for number of light sources: --	Stroboscope effect value SVM: --
With control gear: --	Colour of light adjustable: --
With suspension: --	Luminous flux adjustable: --
Suitable for workplace according to EN 12464-1: --	Beam angle adjustable: --
Connectable conductor cross section: --	Exchangeable control gear: --
Luminous flux in emergency mode: --	Compatible with Casambi: --
Nominal current: --	Energy efficiency class of the light source according to EU regulation 2019/2015: --
Colour temperature: --	Movement sensor/presence detector technology: --
Max. system power: --	Luminaire efficacy: --

Rated luminous flux according to IEC 62722-2-1: --  
Colour of light: --  
Constant light output (CLO): --  
IFTTT support available: --  
Type of wiring: --  
Rated lifetime L70/B50 at 25 °C: --

Rated luminous flux according to IEC 62722-2-1: --  
Emergency power supply system: --  
Power consumption in emergency mode: --  
Emergency function monitoring system: --  
Containing product according to 2019/2020/EU: --  
Power factor: --

## PACKING\_INFORMATION

PACKING\_CODE BX

PACKING\_FORM Box  
<p>A non-specific term that refers to a non-flexible, three-dimensional packaging with closed sides that can be completely enveloped and made of any material. Although some boxes are suitable for reuse or rescue, they can also be for one-off use, depending on the product</p>

STATISTICS 94051900

