


## DOTS Plug-In Kit white + 3x E27 Crystal Tiche clear (700281.00L)

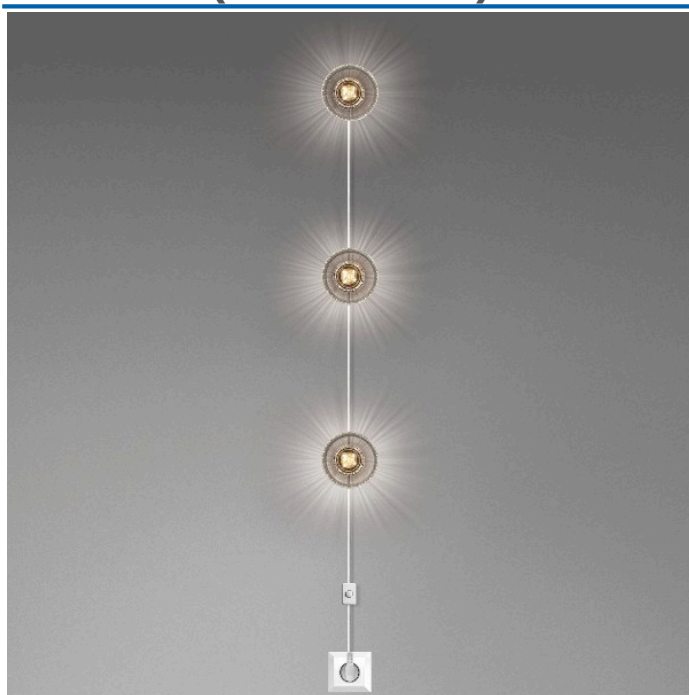

ARTICLE\_NUMBER: 810345.00A

CHANGED\_LAST: 22-09-2025

BRAND: Daylight Italia

ETIM\_GROUP: EG000027 - Luminaires

ETIM\_CLASS: EC002892 - Ceiling-/wall luminaire

SYNONYM: Bed lighting luminaire, Bed wall luminaire, Bulleye, Ceiling and wall luminaire, Ceiling- and wall luminaire, Ceiling-/wall luminaire, Downlighter, Facade luminaire, FL luminaire



## FEATURES

|                                                                                     |                                                                               |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Protection class according to IEC 61140: --                                         | Colour consistency (McAdam ellipse): --                                       |
| Width: --                                                                           | Total harmonic distortion: --                                                 |
| Outer diameter: --                                                                  | Photobiological safety according to EN 62471: --                              |
| Lamp holder: --                                                                     | Degree of protection (NEMA): --                                               |
| Conductor cross section: --                                                         | Rated ambient temperature according to IEC 62722-2-1: --                      |
| Connection type: --                                                                 | Filament test according to IEC 60695-2-11: --                                 |
| Housing colour: --                                                                  | Dimming 0-10 V: --                                                            |
| Dimmable: --                                                                        | Dimming 1-10 V: --                                                            |
| With connection cord and plug: --                                                   | Dimming DALI: --                                                              |
| Voltage type: --                                                                    | Dimming DMX: --                                                               |
| With movement sensor: --                                                            | Dimming potentiometer (integrated): --                                        |
| Suitable for lamp power: --                                                         | Dimming LineSwitch: --                                                        |
| Type of grid: --                                                                    | Dimming manufacturer's proprietary system: --                                 |
| Length of power cord: --                                                            | Dimming mains voltage modulation: --                                          |
| Type of control gear: --                                                            | Dimming phase cut-off (trailing edge): --                                     |
| Colour rendering index CRI: --                                                      | Dimming phase cut-on (leading edge): --                                       |
| Suitable for wall mounting: --                                                      | Dimming programmable: --                                                      |
| Built-in width: --                                                                  | Dimming RF: --                                                                |
| Built-in diameter: --                                                               | Dimming Sine Wave Reduction: --                                               |
| With switch: --                                                                     | Dimming Touch and Dim: --                                                     |
| With light sensor: --                                                               | Dimming Zigbee: --                                                            |
| Suitable for suspended mounting: --                                                 | Dimming with push-button: --                                                  |
| Luminous intensity: --                                                              | No dim function: --                                                           |
| Number of poles: --                                                                 | Light distributor: --                                                         |
| Length: --                                                                          | Luminaire efficacy: --                                                        |
| Height/depth: --                                                                    | Dimming DSI: --                                                               |
| Housing material: --                                                                | Unified Glare Ratio (UGR): --                                                 |
| Lamp type: --                                                                       | Operation by Bluetooth: --                                                    |
| With presence detector: --                                                          | Compatible with Apple HomeKit: --                                             |
| Degree of protection (IP), front side: --                                           | Compatible with Google Assistant: --                                          |
| Built-in length: --                                                                 | Compatible with Amazon Alexa: --                                              |
| Suitable for light line configuration: --                                           | Max. number of luminaires per miniature circuit breaker C16 (MCB): --         |
| Suitable for emergency lighting: --                                                 | Max. number of luminaires per miniature circuit breaker B16 (MCB): --         |
| Light outlet: --                                                                    | Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq): -- |
| Light distribution: --                                                              | Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq): -- |
| Material cover: --                                                                  | Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq): -- |
| Impact strength: --                                                                 | Failure rate at median useful life of 35,000 h at 25 °C ambient (tq): --      |
| Nominal voltage: --                                                                 | Failure rate at median useful life of 50,000 h at 25 °C ambient (tq): --      |
| Emergency power supply integrated: --                                               | Failure rate at median useful life of 75,000 h at 25 °C ambient (tq): --      |
| Degree of protection (IP): --                                                       | Dimming DALI-2: --                                                            |
| With light source: --                                                               | Flickering value Pst LM: --                                                   |
| With mounting material: --                                                          | Stroboscope effect value SVM: --                                              |
| Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24: -- | Colour of light adjustable: --                                                |
| Covering of the luminaire with thermally insulating material possible: --           | Luminous flux adjustable: --                                                  |

|                                                    |                                                                                      |
|----------------------------------------------------|--------------------------------------------------------------------------------------|
| Suitable for number of light sources: --           | Beam angle adjustable: --                                                            |
| Suitable for built-in mounting: --                 | Exchangeable control gear: --                                                        |
| With control gear: --                              | Compatible with Casambi: --                                                          |
| Suitable for workplace according to EN 12464-1: -- | Energy efficiency class of the light source according to EU regulation 2019/2015: -- |
| Suitable for surface mounting: --                  | Luminous intensity: --                                                               |
| Beam angle: --                                     | Degree of protection (IP), rear side: --                                             |
| Connectable conductor cross section: --            | Movement sensor/presence detector technology: --                                     |
| Luminous flux in emergency mode: --                | Luminaire efficacy: --                                                               |
| Nominal current: --                                | Rated luminous flux according to IEC 62722-2-1: --                                   |
| Colour temperature: --                             | Emergency power supply system: --                                                    |
| Max. system power: --                              | Power consumption in emergency mode: --                                              |
| Rated luminous flux according to IEC 62722-2-1: -- | Emergency function monitoring system: --                                             |
| Colour of light: --                                | Containing product according to 2019/2020/EU: --                                     |
| With air slots: --                                 | Total harmonic distortion (THD): --                                                  |
| Suitable for clamp-mounting: --                    | Max. number of luminaires per miniature circuit breaker C10 (MCB): --                |
| Constant light output (CLO): --                    | Suitable for ceiling mounting: --                                                    |
| IFTTT support available: --                        | Built-in height/depth: --                                                            |
| Type of wiring: --                                 | Surface protection housing: --                                                       |
| Rated lifetime L70/B50 at 25 °C: --                | Power factor: --                                                                     |
| Rated lifetime L80/B50 at 25 °C: --                | Meets min. EIA service life criterion L90 (at 50,000 hours at tq = 25°C): --         |

## PACKING\_INFORMATION

|              |                                                                                                                                                                                                                                                                                            |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PACKING_CODE | BX                                                                                                                                                                                                                                                                                         |
| PACKING_FORM | Box<br><p>A non-specific term that refers to a non-flexible, three-dimensional packaging with closed sides that can be completely enveloped and made of any material. Although some boxes are suitable for reuse or rescue, they can also be for one-off use, depending on the product</p> |
| STATISTICS   | 94051990                                                                                                                                                                                                                                                                                   |

