


## LED panel 32W 4000K 4000Lm 595x595 mm PH driver GEN2

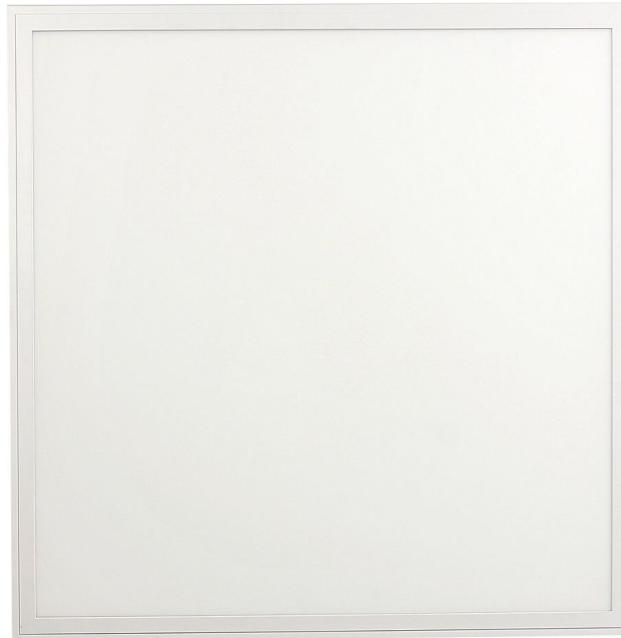

---

LED panel 32W 4000K 4000Lm 595x595 mm PH driver GEN2

---

ARTICLE\_NUMBER: TH 03019-1

---

CHANGED\_LAST: 01-10-2025

---

BRAND: Thorgeon

---

ETIM\_GROUP: EG000027 - Luminaires


---

ETIM\_CLASS: EC002892 - Ceiling-/wall luminaire

---

SYNONYM: Bed lighting luminaire, Bed wall luminaire, Bulleye, Ceiling and wall luminaire, Ceiling- and wall luminaire, Ceiling-/wall luminaire, Downlighter, Facade luminaire, FL luminaire

---

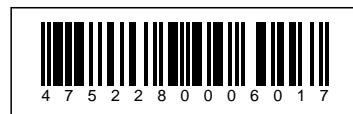



## FEATURES

Protection class according to IEC 61140:	II	Colour consistency (McAdam ellipse):	SDCM6
Width:	595 mm	Total harmonic distortion:	SDCM6
Outer diameter:	-mm	Photobiological safety according to EN 62471:	SDCM6
Lamp holder:	Other	Degree of protection (NEMA):	2
Conductor cross section:	-mm <sup>2</sup>	Rated ambient temperature according to IEC	- °C 62722-2-1:
Connection type:	Plug	Filament test according to IEC 60695-2-11:	- °C
Housing colour:	White	Dimming 0-10 V:	NO
Dimmable:	NO	Dimming 1-10 V:	NO
With connection cord and plug:	NO	Dimming DALI:	NO
Voltage type:	DC	Dimming DMX:	NO
With movement sensor:	NO	Dimming potentiometer (integrated):	NO
Suitable for lamp power:	- W	Dimming LineSwitch:	NO
Type of grid:	- W	Dimming manufacturer's proprietary system:	NO
Length of power cord:	-mm	Dimming mains voltage modulation:	NO
Type of control gear:	Not required	Dimming phase cut-off (trailing edge):	NO
Colour rendering index CRI:	80-89	Dimming phase cut-on (leading edge):	NO
Suitable for wall mounting:	NO	Dimming programmable:	NO
Built-in width:	-mm	Dimming RF:	NO
Built-in diameter:	-mm	Dimming Sine Wave Reduction:	NO
With switch:	NO	Dimming Touch and Dim:	NO
With light sensor:	NO	Dimming Zigbee:	NO
Suitable for suspended mounting:	NO	Dimming with push-button:	NO
Luminous intensity:	-cd	No dim function:	YES
Number of poles:	-cd	Light distributor:	Diffuser lens/optic/panel
Length:	595 mm	Luminaire efficacy:	-lm/W
Height/depth:	-mm	Dimming DSI:	NO
Housing material:	Aluminium	Unified Glare Ratio (UGR):	NO
Lamp type:	LED not exchangeable	Operation by Bluetooth:	NO
With presence detector:	NO	Compatible with Apple HomeKit:	NO
Degree of protection (IP), front side:	NO	Compatible with Google Assistant:	NO
Built-in length:	-mm	Compatible with Amazon Alexa:	NO
Suitable for light line configuration:	NO	Max. number of luminaires per miniature circuit breaker C16 (MCB):	NO
Suitable for emergency lighting:	NO	Max. number of luminaires per miniature circuit breaker B16 (MCB):	NO
Light outlet:	NO	Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq):	-%
Light distribution:	NO	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):	98.46 %
Material cover:	Without cover	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq):	-%
Impact strength:	IK05	Failure rate at median useful life of 35,000 h at 25 °C ambient (tq):	-%
Nominal voltage:	220 ~ 240	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):	-%
Emergency power supply integrated:	NO	Failure rate at median useful life of 75,000 h at 25 °C ambient (tq):	-%
Degree of protection (IP):	IP20	Dimming DALI-2:	NO
With light source:	YES	Flickering value Pst LM:	NO
With mounting material:	NO	Stroboscope effect value SVM:	NO
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24:	NO	Colour of light adjustable:	NO
Covering of the luminaire with thermally insulating material possible:	NO	Luminous flux adjustable:	NO



Wernhoutseweg 38A  
4884 AW Wernhout  
The Netherlands



+31 (0)76 - 59 712 20



info@vezalux.nl



[www.vezalux.com](http://www.vezalux.com)

Suitable for number of light sources:	1	Beam angle adjustable:	NO
Suitable for built-in mounting:	NO	Exchangeable control gear:	NO
With control gear:	NO	Compatible with Casambi:	NO
Suitable for workplace according to EN 12464-1:	NO	Energy efficiency class of the light source according to EU regulation 2019/2015:	NO
Suitable for surface mounting:	NO	Luminous intensity:	- cd
Beam angle:	NO	Degree of protection (IP), rear side:	- cd
Connectable conductor cross section:	- mm <sup>2</sup>	Movement sensor/presence detector technology:	- cd
Luminous flux in emergency mode:	-lm	Luminaire efficacy:	- cd
Nominal current:	1000 mA	Rated luminous flux according to IEC 62722-2-1:	- cd
Colour temperature:	- K	Emergency power supply system:	- cd
Max. system power:	-W	Power consumption in emergency mode:	- cd
Rated luminous flux according to IEC 62722-2-1:	-lm	Emergency function monitoring system:	- cd
Colour of light:	-lm	Containing product according to 2019/2020/EU:	- cd
With air slots:	NO	Total harmonic distortion (THD):	- cd
Suitable for clamp-mounting:	NO	Max. number of luminaires per miniature circuit breaker C10 (MCB):	- cd
Constant light output (CLO):	NO	Suitable for ceiling mounting:	YES
IFTTT support available:	NO	Built-in height/depth:	-mm
Type of wiring:	NO	Surface protection housing:	Lacquered
Rated lifetime L70/B50 at 25 °C:	-h	Power factor:	Lacquered
Rated lifetime L80/B50 at 25 °C:	-h	Meets min. EIA service life criterion L90 (at 50,000 hours at tq = 25°C):	NO

## PACKING\_INFORMATION

WEIGHT	2.2 kg
WIDTH	603 mm
HEIGHT	20 mm
LENGTH	603 mm
PACKING_CODE	BX
PACKING_FORM	Box <p>&lt;p&gt;A non-specific term that refers to a non-flexible, three-dimensional packaging with closed sides that can be completely enveloped and made of any material. Although some boxes are suitable for reuse or rescue, they can also be for one-off use, depending on the product&lt;/p&gt;</p>
STATISTICS	85395100

