


Inbouwspot - Geborsteld zilver - MR16 round Max 50W Deluna



ARTICLE_NUMBER:	85007423
CHANGED_LAST:	13-12-2024
BRAND:	Vezalux
ETIM_GROUP:	EG000027 - Luminaires
ETIM_CLASS:	EC002892 - Ceiling-/wall luminaire
SYNONYM:	Bed lighting luminaire, Bed wall luminaire, Bulleye, Ceiling and wall luminaire, Ceiling- and wall luminaire, Ceiling-/wall luminaire, Downlighter, Facade luminaire, FL luminaire

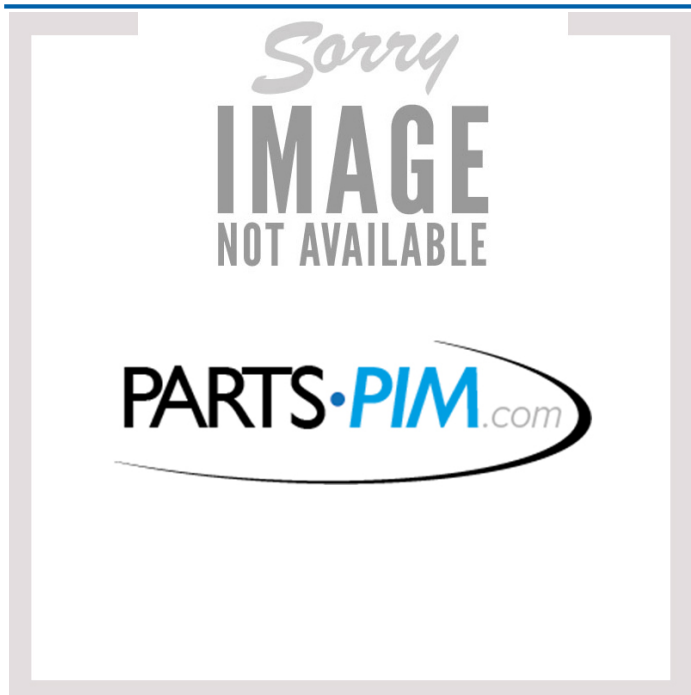

FEATURES

Width:	83 mm	Rated ambient temperature according to IEC 62722-2-1:	NA/NA °C
Outer diameter:	83 mm	Dimming 0-10 V:	NO
Conductor cross section:	0 mm²	Dimming 1-10 V:	NO
Housing colour:	Silver	Dimming DALI:	NO
With movement sensor:	NO	Dimming DMX:	NO
Suitable for lamp power:	NA/NA W	Dimming potentiometer (integrated):	NO
Built-in width:	0 mm	Dimming LineSwitch:	NO
Built-in diameter:	68 mm	Dimming manufacturer's proprietary system:	NO
With light sensor:	NO	Dimming mains voltage modulation:	NO
Suitable for suspended mounting:	NO	Dimming phase cut-off (trailing edge):	NO
Luminous intensity:	0 cd	Dimming phase cut-on (leading edge):	NO
Length:	0 mm	Dimming programmable:	NO
Height/depth:	130 mm	Dimming RF:	NO
Housing material:	Aluminium	Dimming Sine Wave Reduction:	NO
Built-in length:	0 mm	Dimming Touch and Dim:	NO
Suitable for light line configuration:	NO	Dimming Zigbee:	NO
Suitable for emergency lighting:	NO	Dimming with push-button:	NO
Nominal voltage:	NA/NA V	No dim function:	NO
Emergency power supply integrated:	NO	Luminaire efficacy:	0 lm/W
With light source:	NO	Dimming DSI:	NO
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24:	NO	Operation by Bluetooth:	NO
Covering of the luminaire with thermally insulating material possible:	NO	Compatible with Apple HomeKit:	NO
Suitable for built-in mounting:	NO	Compatible with Google Assistant:	NO
With control gear:	NO	Compatible with Amazon Alexa:	NO
Suitable for workplace according to EN 12464-1:	NO	Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq):	0 %
Suitable for surface mounting:	NO	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Nominal current:	NA/NA mA	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
Colour temperature:	NA/NA K	Failure rate at median useful life of 35,000 h at 25 °C ambient (tq):	0 %
Max. system power:	0 W	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Rated luminous flux according to IEC 62722-2-1:	0 lm	Failure rate at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
With air slots:	NO	Dimming DALI-2:	NO
Constant light output (CLO):	NO	Exchangeable control gear:	NO
IFTTT support available:	NO	Suitable for ceiling mounting:	NO
Rated lifetime L70/B50 at 25 °C:	0 h	Built-in height/depth:	0 mm

PACKING_INFORMATION

WEIGHT	0 gr
PACKING_CODE	BX
PACKING_FORM	Box

A non-specific term that refers to a non-flexible, three-dimensional packaging with closed sides that can be completely enveloped and made of any material. Although

some boxes are suitable for reuse or rescue, they can also be
for one -off use, depending on the product!

PAGE 3/3

PAGE 3/3

IBAN NL65 INGB 0008 3845 00
BIC INGBNL2A

BTW NL857194811B01
KVK 67841333

All transactions with Veزالux are subject to our general terms of trading
as declared with the Chamber of Commerce at Breda 67841333.

