


## Elba pendel ball white + G125X178 POR

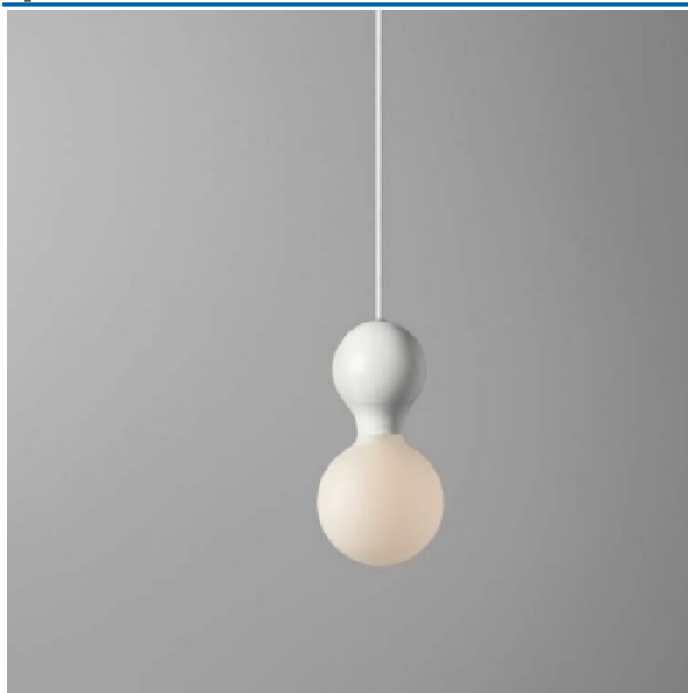

ARTICLE\_NUMBER: 810267.00A

CHANGED\_LAST: 23-05-2025

BRAND: Daylight Italia

ETIM\_GROUP: EG000027 - Luminaires

ETIM\_CLASS: EC001743 - Pendant luminaire

SYNONYM: Grid luminaire, Pendant luminaire, Prisms luminaire, Watertight luminaire



## FEATURES

Width:	0 mm	IFTTT support available:	NO
Reflector:	None	Rated lifetime L70/B50 at 25 °C:	15000 h
Lamp holder:	E27	Dimming 0-10 V:	NO
Conductor cross section:	0 mm²	Dimming 1-10 V:	NO
Connection type:	Push-in clamp	Dimming DALI:	NO
Housing colour:	White	Dimming DMX:	NO
Suitable for lamp power:	NA/NA W	Dimming potentiometer (integrated):	NO
Type of control gear:	Not required	Dimming LineSwitch:	NO
Colour rendering index CRI:	90-100	Dimming manufacturer's proprietary system:	NO
Diameter:	125 mm	Dimming mains voltage modulation:	NO
Length:	178 mm	Dimming phase cut-off (trailing edge):	NO
Height/depth:	0 mm	Dimming phase cut-on (leading edge):	NO
Housing material:	Plastic	Dimming programmable:	NO
Lamp type:	LED exchangeable	Dimming RF:	NO
Direct-/indirect proportion separately controllable:	NO	Dimming Sine Wave Reduction:	NO
Suitable for light line configuration:	NO	Dimming Touch and Dim:	NO
Suitable for emergency lighting:	NO	Dimming Zigbee:	NO
Light outlet:	Direct	Dimming with push-button:	NO
Light distribution:	Symmetric	No dim function:	NO
Pendant length:	1500/1500 mm	Light distributor:	None
Nominal voltage:	220/240 V	Luminaire efficacy:	640 lm/W
Emergency power supply integrated:	NO	Dimming DSI:	NO
Degree of protection (IP):	IP20	Compatible with Apple HomeKit:	NO
With light source:	NO	Compatible with Google Assistant:	NO
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24:	NO	Compatible with Amazon Alexa:	NO
Suitable for number of light sources:	1	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
With control gear:	NO	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
With suspension:	NO	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Suitable for workplace according to EN 12464-1:	NO	Failure rate at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
Nominal current:	NA/NA mA	Dimming DALI-2:	NO
Colour temperature:	2700/2700 K	Colour of light adjustable:	No
Max. system power:	91 W	Luminous flux adjustable:	No
Rated luminous flux according to IEC 62722-2-1:	640 lm	Beam angle adjustable:	No
Colour of light:	White	Exchangeable control gear:	NO
Constant light output (CLO):	NO		

## PACKING\_INFORMATION

WEIGHT	0 gr
PACKING_CODE	BX
PACKING_FORM	Box

A non-specific term that refers to a non-flexible, three-dimensional packaging with closed sides that can be completely enveloped and made of any material. Although some boxes are suitable for reuse or rescue, they can also be

for one -off use, depending on the product

---

STATISTICS 94051041

---

PAGE 3/4

PAGE 3/4

**IBAN** NL65 INGB 0008 3845 00  
**BIC** INGBNL2A

**BTW** NL857194811B01  
**KVK** 67841333

All transactions with Veزالux are subject to our general terms of trading  
as declared with the Chamber of Commerce at Breda 67841333.



