


Kit rosette retangular 2x Cri brass + white cable Ciaobella 260



ARTICLE_NUMBER:	810067.00A
CHANGED_LAST:	23-05-2025
BRAND:	Daylight Italia
ETIM_GROUP:	EG000027 - Luminaires
ETIM_CLASS:	EC001743 - Pendant luminaire
SYNONYM:	Grid luminaire, Pendant luminaire, Prisms luminaire, Watertight luminaire

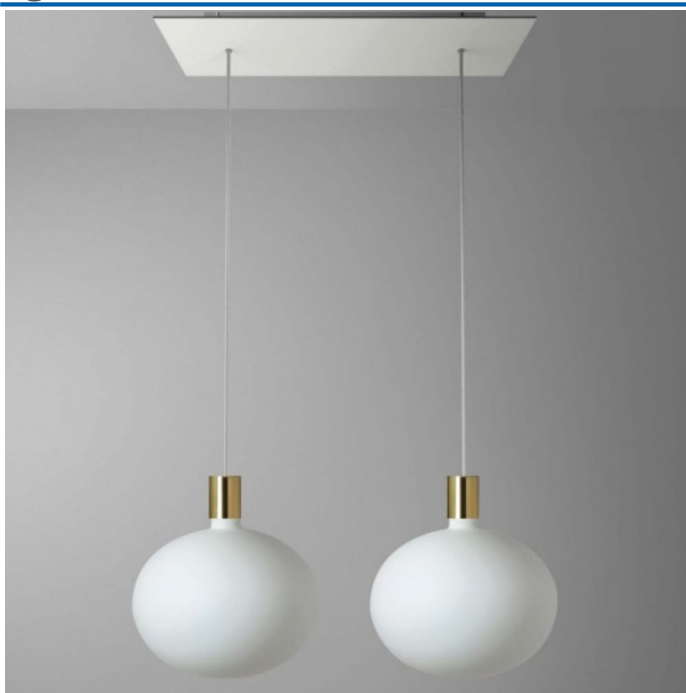

FEATURES

Width:	670 mm	IFTTT support available:	NO
Reflector:	None	Rated lifetime L70/B50 at 25 °C:	15000 h
Lamp holder:	E27	Filament test according to IEC 60695-2-11:	None
Conductor cross section:	0 mm²	Dimming 0-10 V:	NO
Housing colour:	White	Dimming 1-10 V:	NO
Suitable for lamp power:	NA/NA W	Dimming DALI:	NO
Type of grid:	White	Dimming DMX:	NO
Type of control gear:	Not required	Dimming potentiometer (integrated):	NO
Colour rendering index CRI:	80-89	Dimming LineSwitch:	NO
Diameter:	670 mm	Dimming manufacturer's proprietary system:	NO
Length:	670 mm	Dimming mains voltage modulation:	NO
Height/depth:	1500 mm	Dimming phase cut-off (trailing edge):	NO
Housing material:	Plastic	Dimming phase cut-on (leading edge):	NO
Lamp type:	LED exchangeable	Dimming programmable:	NO
Direct-/indirect proportion separately controllable:	NO	Dimming RF:	NO
Suitable for light line configuration:	NO	Dimming Sine Wave Reduction:	NO
Suitable for emergency lighting:	NO	Dimming Touch and Dim:	NO
Light outlet:	Direct	Dimming Zigbee:	NO
Light distribution:	Symmetric	Dimming with push-button:	NO
Material cover:	Plastic, opal	No dim function:	NO
Pendant length:	1500/1500 mm	Light distributor:	None
Nominal voltage:	220/240 V	Luminaire efficacy:	100 lm/W
Emergency power supply integrated:	NO	Dimming DSI:	NO
Degree of protection (IP):	IP20	Compatible with Apple HomeKit:	NO
With light source:	NO	Compatible with Google Assistant:	NO
Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24:	NO	Compatible with Amazon Alexa:	NO
Suitable for number of light sources:	2	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
With control gear:	NO	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
With suspension:	NO	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Suitable for workplace according to EN 12464-1:	NO	Failure rate at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
Nominal current:	NA/NA mA	Dimming DALI-2:	NO
Colour temperature:	2700/2700 K	Colour of light adjustable:	No
Max. system power:	0 W	Luminous flux adjustable:	No
Rated luminous flux according to IEC 62722-2-1:	2000 lm	Beam angle adjustable:	No
Colour of light:	White	Exchangeable control gear:	NO
Constant light output (CLO):	NO		

PACKING_INFORMATION

WEIGHT	0 gr
PACKING_CODE	BX
PACKING_FORM	Box

A non-specific term that refers to a non-flexible, three-

dimensional packaging with closed sides that can be completely enveloped and made of any material. Although some boxes are suitable for reuse or rescue, they can also be for one-off use, depending on the product

STATISTICS 94051041

PAGE 3/4

PAGE 3/4

IBAN NL65 INGB 0008 3845 00
BIC INGBNL2A

BTW NL857194811B01
KVK 67841333

All transactions with Veزالux are subject to our general terms of trading as declared with the Chamber of Commerce at Breda 67841333.



