


Kit rosette retangular 2x Cri brass + white cable Ciaobella 260



Kit rosette retangular 2x Cri brass + white cable Ciaobella 260

Article number:	810067.00A
Status product:	126 - CURRENT
Changed last:	13-03-2025
Brand:	Daylight Italia
Type:	Kit rosette
ETIM Group:	EG000027 - Luminaires
ETIM Classes:	EC001743 - Pendant luminaire
Synonym:	Grid luminaire, Pendant luminaire, Prisms luminaire, Watertight luminaire

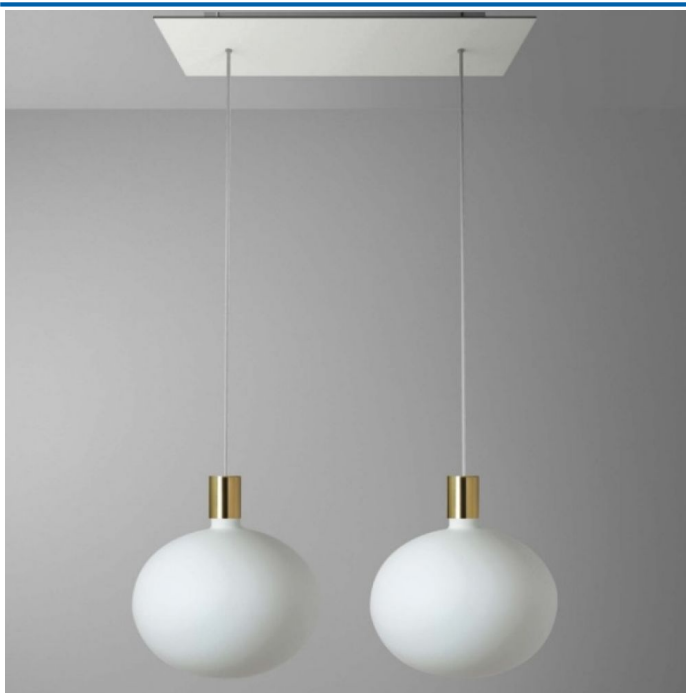

Feature

Suitable for light line configuration:	No	Light outlet:	Direct
Suitable for workplace according to EN 12464-1:	No	Direct-/indirect proportion separately controllable:	No
Lamp type:	LED exchangeable	Energy efficiency class of the built-in lamp:	Other
With light source:	Yes	Energy efficiency class of the provided exchangeable built-in lamp:	E
Suitable for number of light sources:	2	Highest energy efficiency class of the exchangeable lamp:	E
Lamp holder:	E27	Lowest energy efficiency class of the exchangeable lamp:	E
Housing material:	Plastic	Rated life time L70/B50 at 25 °C:	15000 h
Housing colour:	White	Rated life time L80/B10 at 25 °C:	15000 h
Material cover:	Plastic, opal	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Type of grid:	White	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
Nominal voltage:	220 ~ 240 V	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Nominal current:	0 ~ 0 mA	Failure rate at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
LED nominal current at constant current:	0 ~ 0 mA	Degree of protection (IP):	IP20
Type of control gear:	Not required	Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24:	No
With control gear:	No	Suitable for emergency lighting:	No
Exchangeable control gear:	No	Emergency power supply integrated:	No
Dimming 0-10 V:	No	Filament test according to IEC 60695-2-11:	None
Dimming 1-10 V:	No	Suitable for lamp power:	0 ~ 0 W
Dimming DALI:	No	Max. system power:	0 W
Dimming DALI-2:	No	Rated luminous flux according to IEC 62722-2-1:	2000 lm
Dimming DMX:	No	Colour of light:	White
Dimming programmable:	No	Luminaire efficacy:	100 lm/W
Dimming DSI:	No	Colour temperature:	2700 ~ 2700 K
Dimming RF:	No	Colour rendering index CRI:	80-89
Dimming potentiometer (integrated):	No	Constant light output (CLO):	No
Dimming GPRS:	No	Colour of light adjustable:	No
Dimming LineSwitch:	No	Luminous flux adjustable:	No
Dimming manufacturer's proprietary system:	No	Beam angle adjustable:	No
Dimming mains voltage modulation:	No	Width:	670 mm
Dimming phase cut-off:	Yes	Height/depth:	1500 mm
Dimming phase cut-on:	No	Length:	670 mm
Dimming Sine Wave Reduction:	No	Diameter:	670 mm
Dimming Touch and Dim:	No	With suspension:	Yes
Dimming Zigbee:	No	Pendant length:	1500 ~ 1500 mm
Dimming with push-button:	No	Conductor cross section:	0 mm²
No dim function:	No	Compatible with Apple HomeKit:	No
Light distributor:	None	Compatible with Google Assistant:	No
Reflector:	None	Compatible with Amazon Alexa:	No
Light sharing:	Symmetric	IFTTT support available:	No

Packaging data

Weight	0 gr
Customs code	94051041

