


## Rutec - Inbouwspot - Grafiet - QR-CB 51 / MR16 - Max 50 Watt



Rutec - Inbouwspot - Grafiet - QR-CB 51 / MR16 - Max 50 Watt

Article number:	55357R
Status product:	94E - Article ahead (GS1 Code)
Changed last:	13-12-2024
Brand:	Rutec
Type:	Recessed spot
ETIM Group:	EG000027 - Luminaires
ETIM Classes:	EC002892 - Ceiling-/wall luminaire
Synonym:	Bed lighting luminaire, Bed wall luminaire, Bulleye, Ceiling and wall luminaire, Ceiling- and wall luminaire, Ceiling-/wall luminaire, Downlighter, Facade luminaire, FL luminaire

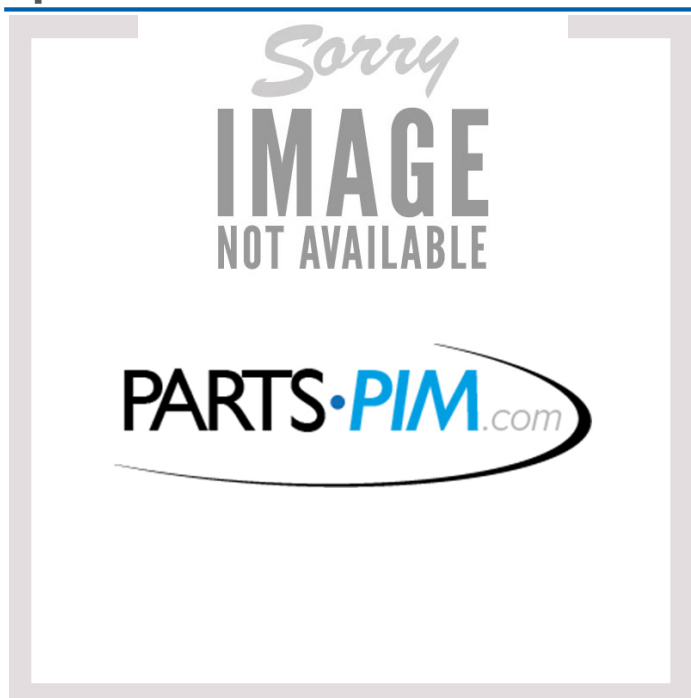

## Feature

Suitable for wall mounting:	No	Rated life time L80/B10 at 25 °C:	0 h
Suitable for suspended mounting:	No	Rated life time L90/B10 at 25 °C:	0 h
Suitable for ceiling mounting:	Yes	Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq):	0 %
Suitable for built-in mounting:	Yes	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Suitable for surface mounting:	No	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
Suitable for light line configuration:	No	Failure rate at median useful life of 35,000 h at 25 °C ambient (tq):	0 %
Suitable for workplace according to EN 12464-1:	No	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
With light source:	No	Failure rate at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
Suitable for number of light sources:	1	Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24:	No
Lamp holder:	GU5.3	Rated ambient temperature according to IEC 62722-2-1:	NA °C
Housing material:	Other	Suitable for emergency lighting:	No
Housing colour:	Other	Emergency power supply integrated:	No
Nominal voltage:	NA V	With movement sensor:	No
Nominal current:	NA mA	With light sensor:	No
With control gear:	No	Covering of the luminaire with thermally insulating material possible:	No
Exchangeable control gear:	No	With air slots:	No
Dimming 0-10 V:	No	Suitable for lamp power:	NA W
Dimming 1-10 V:	No	Max. system power:	0 W
Dimming DALI-2:	No	Luminaire efficacy:	0 lm/W
Dimming DALI:	No	Rated luminous flux according to IEC 62722-2-1:	0 lm
Dimming DMX:	No	Colour temperature:	NA K
Dimming DSI:	No	Constant light output (CLO):	No
Dimming potentiometer (integrated):	No	Width:	0 mm
Dimming GPRS:	No	Height/depth:	0 mm
Dimming LineSwitch:	No	Length:	0 mm
Dimming manufacturer's proprietary system:	No	Outer diameter:	0 mm
Dimming mains voltage modulation:	No	Built-in length:	0 mm
Dimming phase cut-off:	No	Built-in width:	0 mm
Dimming phase cut-on:	No	Built-in height/depth:	0 mm
Dimming programmable:	No	Built-in diameter:	0 mm
Dimming RF:	No	Conductor cross section:	0 mm²
Dimming Sine Wave Reduction:	No	Luminous intensity:	0 cd
Dimming Touch and Dim:	No	Operation by Bluetooth:	No
Dimming Zigbee:	No	Compatible with Apple HomeKit:	No
Dimming with push-button:	No	Compatible with Google Assistant:	No
Dimming depending on control gear:	No	Compatible with Amazon Alexa:	No
No dim function:	No	IFTTT support available:	No
Rated life time L70/B50 at 25 °C:	0 h		

## Packaging data

Weight	0.21 kg
Width	90 mm
Height	50 mm
Length	80 mm
Customs code	94051990