


## Rutec - Inbouwspot - Goud - MR16 - Max 50 Watt



Rutec - Inbouwspot - Goud - MR16 - Max 50 Watt

|                 |  |
|-----------------|--|
| Article number: | 55843W   |
| Status product: | 94E - Article ahead (GS1 Code)   |
| Changed last:   | 13-12-2024   |
| Brand:          | Rutec  |
| Type:           | Recessed spot  |
| ETIM Group:     | EG000027 - Luminaires  |
| ETIM Classes:   | EC002892 - Ceiling-/wall luminaire   |
| Synonym:        | Bed lighting luminaire, Bed wall luminaire, Bulleye, Ceiling and wall luminaire, Ceiling- and wall luminaire, Ceiling-/wall luminaire, Downlighter, Facade luminaire, FL luminaire |

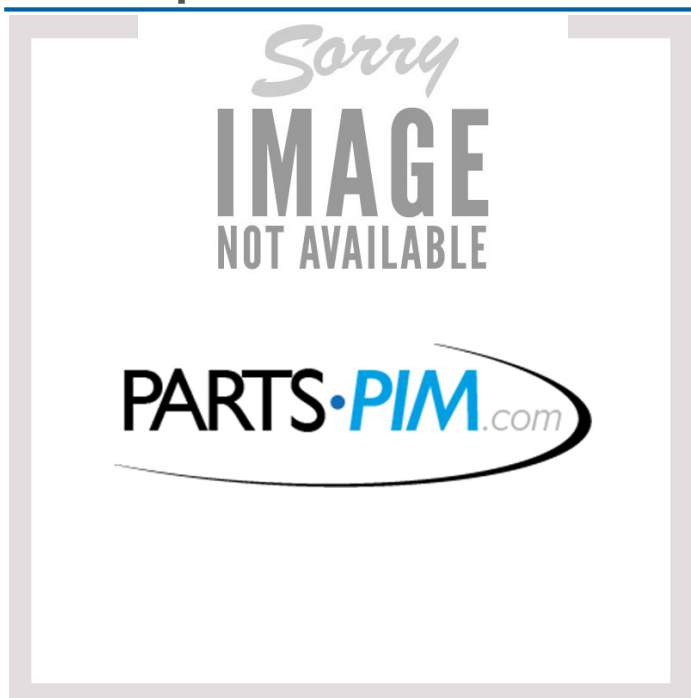

## Feature

|   |           |  |        |
|---|-----------|--|--------|
| Suitable for wall mounting:                     | No        | Rated life time L80/B10 at 25 °C:  | 0 h    |
| Suitable for suspended mounting:                | No        | Rated life time L90/B10 at 25 °C:  | 0 h    |
| Suitable for ceiling mounting:                  | Yes       | Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq):       | 0 %    |
| Suitable for built-in mounting:                 | Yes       | Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):       | 0 %    |
| Suitable for surface mounting:                  | No        | Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq):       | 0 %    |
| Suitable for light line configuration:          | No        | Failure rate at median useful life of 35,000 h at 25 °C ambient (tq):            | 0 %    |
| Suitable for workplace according to EN 12464-1: | No        | Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):            | 0 %    |
| With light source:                              | No        | Failure rate at median useful life of 75,000 h at 25 °C ambient (tq):            | 0 %    |
| Lamp holder:                                    | GU5.3     | Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24: | No     |
| Housing material:                               | Aluminium | Rated ambient temperature according to IEC 62722-2-1:                            | NA °C  |
| Housing colour:                                 | Gold      | Suitable for emergency lighting:   | No     |
| Nominal voltage:                                | NA V      | Emergency power supply integrated:   | No     |
| Nominal current:                                | NA mA     | With movement sensor:  | No     |
| With control gear:                              | No        | With light sensor:   | No     |
| Exchangeable control gear:                      | No        | Covering of the luminaire with thermally insulating material possible:           | No     |
| Dimming 0-10 V:                                 | No        | With air slots:  | No     |
| Dimming 1-10 V:                                 | No        | Suitable for lamp power:   | NA W   |
| Dimming DALI-2:                                 | No        | Max. system power:   | 0 W    |
| Dimming DALI:                                   | No        | Luminaire efficacy:  | 0 lm/W |
| Dimming DMX:                                    | No        | Rated luminous flux according to IEC 62722-2-1:                                  | 0 lm   |
| Dimming DSI:                                    | No        | Colour temperature:  | NA K   |
| Dimming potentiometer (integrated):             | No        | Constant light output (CLO):   | No     |
| Dimming GPRS:                                   | No        | Width:   | 0 mm   |
| Dimming LineSwitch:                             | No        | Height/depth:  | 0 mm   |
| Dimming manufacturer's proprietary system:      | No        | Length:  | 0 mm   |
| Dimming mains voltage modulation:               | No        | Outer diameter:  | 0 mm   |
| Dimming phase cut-off:                          | No        | Built-in length:   | 0 mm   |
| Dimming phase cut-on:                           | No        | Built-in width:  | 0 mm   |
| Dimming programmable:                           | No        | Built-in height/depth:   | 0 mm   |
| Dimming RF:                                     | No        | Built-in diameter:   | 0 mm   |
| Dimming Sine Wave Reduction:                    | No        | Conductor cross section:   | 0 mm²  |
| Dimming Touch and Dim:                          | No        | Luminous intensity:  | 0 cd   |
| Dimming Zigbee:                                 | No        | Operation by Bluetooth:  | No     |
| Dimming with push-button:                       | No        | Compatible with Apple HomeKit:   | No     |
| Dimming depending on control gear:              | No        | Compatible with Google Assistant:  | No     |
| No dim function:                                | No        | Compatible with Amazon Alexa:  | No     |
| Rated life time L70/B50 at 25 °C:               | 0 h       | IFTTT support available:   | No     |

## Packaging data

Weight 0.16 kg

|              |          |
|--------------|----------|
| Width        | 85 mm    |
| Height       | 55 mm    |
| Length       | 85 mm    |
| Customs code | 94051990 |