


## LED PANEL SQUARE 600x 600 mm 40W 4000K



### LED PANEL SQUARE 600x 600 mm 40W 4000K

Article number:	L600-600-40W4K
Status product:	126 - CURRENT
Changed last:	17-02-2025
Brand:	Vezalux
Type:	600x600mm
ETIM Group:	EG000027 - Luminaires
ETIM Classes:	EC002892 - Ceiling-/wall luminaire
Synonym:	Bed lighting luminaire, Bed wall luminaire, Bulleye, Ceiling and wall luminaire, Ceiling- and wall luminaire, Ceiling-/wall luminaire, Downlighter, Facade luminaire, FL luminaire

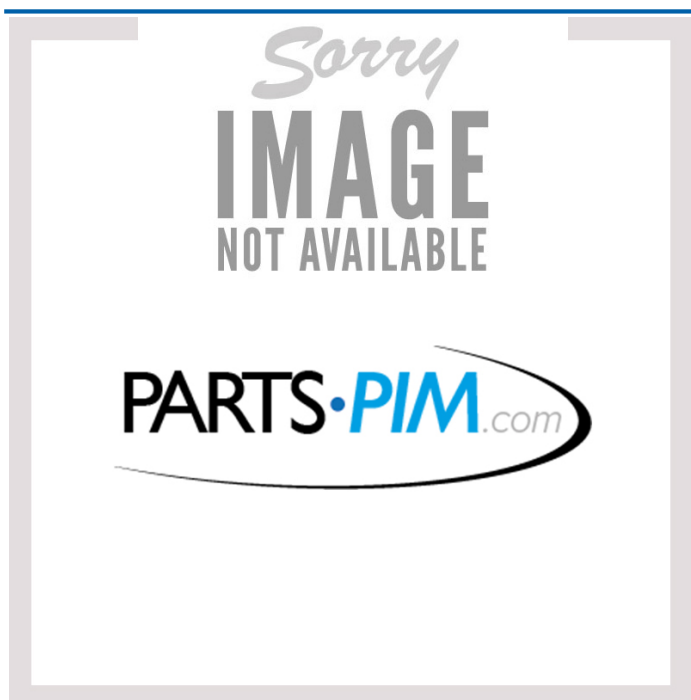

## Feature

Suitable for wall mounting:	No	Highest energy efficiency class of the exchangeable lamp:	A++
Suitable for suspended mounting:	No	Lowest energy efficiency class of the exchangeable lamp:	A+
Suitable for ceiling mounting:	Yes	Rated life time L70/B50 at 25 °C:	0 h
Suitable for built-in mounting:	Yes	Rated life time L80/B10 at 25 °C:	0 h
Suitable for surface mounting:	No	Rated life time L90/B10 at 25 °C:	0 h
Suitable for light line configuration:	No	Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq):	0 %
Suitable for workplace according to EN 12464-1:	No	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Lamp type:	LED not exchangeable	Lumen maintenance at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
With light source:	Yes	Failure rate at median useful life of 35,000 h at 25 °C ambient (tq):	0 %
Lamp holder:	Other	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
Housing material:	Plastic	Failure rate at median useful life of 75,000 h at 25 °C ambient (tq):	0 %
Surface protection housing:	Untreated	Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24:	No
Housing colour:	White	Rated ambient temperature according to IEC 62722-2-1:	NA °C
Type of grid:	White	Suitable for emergency lighting:	No
Nominal voltage:	100 ~ 240 V	Emergency power supply integrated:	No
Nominal current:	120 ~ 120 mA	With movement sensor:	No
Type of control gear:	LED operating device voltage-controlled	With light sensor:	No
With control gear:	Yes	Covering of the luminaire with thermally insulating material possible:	No
Exchangeable control gear:	Yes	With air slots:	No
Dimming 0-10 V:	No	Suitable for lamp power:	40 ~ 40 W
Dimming 1-10 V:	No	Max. system power:	40 W
Dimming DALI-2:	No	Luminaire efficacy:	0 lm/W
Dimming DALI:	No	Rated luminous flux according to IEC 62722-2-1:	0 lm
Dimming DMX:	No	Colour of light:	White
Dimming DSI:	No	Colour temperature:	4000 ~ 4000 K
Dimming potentiometer (integrated):	No	Constant light output (CLO):	No
Dimming GPRS:	No	Width:	600 mm
Dimming LineSwitch:	No	Height/depth:	0 mm
Dimming manufacturer's proprietary system:	No	Length:	600 mm
Dimming mains voltage modulation:	No	Outer diameter:	0 mm
Dimming phase cut-off:	No	Built-in length:	595 mm
Dimming phase cut-on:	No	Built-in width:	595 mm
Dimming programmable:	No	Built-in height/depth:	0 mm
Dimming RF:	No	Built-in diameter:	0 mm
Dimming Sine Wave Reduction:	No	Conductor cross section:	0 mm²
Dimming Touch and Dim:	No	Connection type:	Other
Dimming Zigbee:	No	Luminous intensity:	0 cd
Dimming with push-button:	No	Operation by Bluetooth:	No
Dimming depending on control gear:	No	Compatible with Apple HomeKit:	No
No dim function:	No	Compatible with Google Assistant:	No
Light distributor:	None	Compatible with Amazon Alexa:	No
Energy efficiency class of the built-in lamp:	A++, A+, A (LED)	IFTTT support available:	No
Energy efficiency class of the provided exchangeable built-in lamp:	A++		

### Packaging data

Weight	0 gr
Customs code	85395200