


## LED DLR SLIM P1 TU8 IP40 22W 830 SST Tungsram

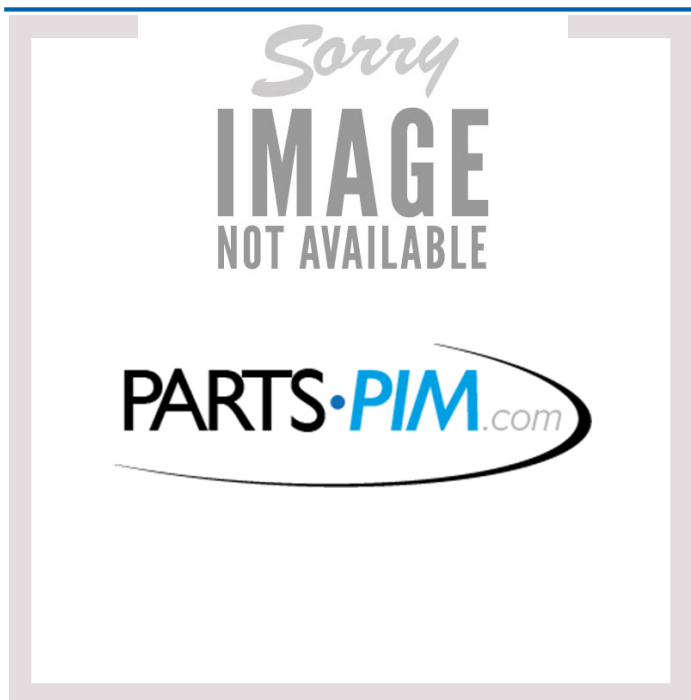

LED DLR SLIM P1 TU8 IP40 22W 830 SST Tungsram

Article number:	TU 93108090
Status product:	94E - Article ahead (GS1 Code)
Changed last:	17-02-2025
Type:	Overig
ETIM Group:	EG000027 - Luminaires
ETIM Classes:	EC001744 - Downlight/spot/floodlight
Synonym:	Building site lighting luminaire, Downlight, Downlight/spot/floodlight, Floodlight, Light-track luminaire, Light-track spot, Projector, Spot, Spot luminaire/floodlight

## Feature

Suitable for surface mounting:	No	No dim function:	No
Suitable for built-in mounting:	Yes	Reflector:	None
Suitable for wall mounting:	Yes	Light distributor:	None
Suitable for suspended mounting:	No	Light sharing:	Symmetric
Suitable for ceiling mounting:	Yes	Energy efficiency class:	A
Suitable for traverse mounting:	No	Energy efficiency class of the built-in lamp:	A
Suitable for pedestal/floor mounting:	Yes	Energy efficiency class of the provided exchangeable built-in lamp:	A
Suitable for light-track mounting:	No	Rated life time L70/B50 at 25 °C:	45000 h
Suitable for clamp-mounting:	No	Rated life time L80/B10 at 25 °C:	45000 h
Suitable for low voltage cable system:	No	Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq):	0 %
Adjustability:	Not adjustable	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
With movement sensor:	No	Lumen maintenance at median useful life of 100,000 h at 25 °C ambient (tq):	0 %
With light sensor:	No	Failure rate at median useful life of 35,000 h at 25 °C ambient (tq):	0 %
Lamp type:	LED not exchangeable	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):	0 %
With light source:	Yes	Failure rate at median useful life of 100,000 h at 25 °C ambient (tq):	0 %
Lamp holder:	None	Constant light output (CLO):	No
Housing material:	Plastic	Rated ambient temperature according to IEC 62722-2-1:	NA °C
Surface protection:	Plastic-coated	Suitable for lamp power:	22 ~ 22 W
Housing colour:	White	Max. system power:	22 W
Material cover:	Plastic, opal	Colour of light:	White
Surface brushed:	No	Colour temperature:	3000 ~ 3000 K
Nominal voltage:	220 ~ 240 V	Luminous flux:	NA lm
LED nominal current at constant current:	NA mA	Rated luminous flux according to IEC 62722-2-1:	0 lm
Type of control gear:	LED operating device voltage-controlled	Luminous intensity:	0 cd
With control gear:	Yes	Colour of light adjustable:	No
Exchangeable control gear:	Yes	Luminous flux adjustable:	No
Dimming depending on control gear:	No	Beam angle adjustable:	No
Dimming 0-10 V:	No	Width:	240 mm
Dimming 1-10 V:	No	Height/depth:	30 mm
Dimming DALI-2:	No	Length:	240 mm
Dimming DALI:	No	Outer diameter:	240 mm
Dimming DMX:	No	Built-in width:	230 mm
Dimming DSI:	No	Built-in height/depth:	31 mm
Dimming potentiometer (integrated):	No	Built-in length:	230 mm
Dimming GPRS:	No	Built-in diameter:	230 ~ 230 mm
Dimming LineSwitch:	No	Conductor cross section:	0 mm²
Dimming manufacturer's proprietary system:	No	Connectable conductor cross section:	NA mm²
Dimming mains voltage modulation:	No	Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24:	No
Dimming phase cut-off:	No	Emergency power supply integrated:	No
Dimming phase cut-on:	No	Luminaire efficacy:	0 lm/W
Dimming programmable:	No	Suitable for workplace according to EN 12464-1:	No
Dimming RF:	No	Covering of the luminaire with thermally insulating material possible:	No
Dimming Sine Wave Reduction:	No	IFTTT support available:	No

Dimming Touch and Dim:	No	Compatible with Apple HomeKit:	No
Dimming Zigbee:	No	Compatible with Google Assistant:	No
Dimming with push-button:	No	Compatible with Amazon Alexa:	No

### Packaging data

Weight	0 gr
Customs code	94051098