


## LED DLR G1 33W 830 S 55Degr. W Tungsram

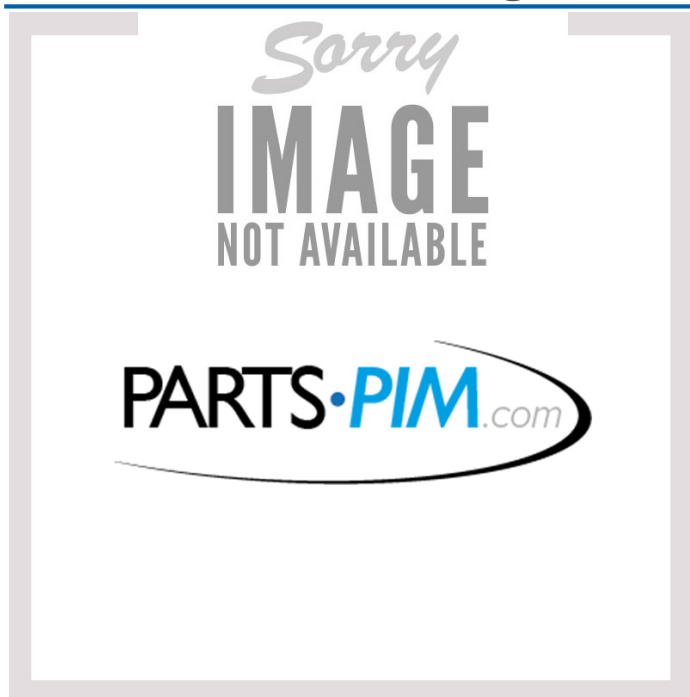

### LED DLR G1 33W 830 S 55Degr. W Tungsram

|                 |   |
|-----------------|---|
| Article number: | TU 93113200   |
| Status product: | 94E - Article ahead (GS1 Code)  |
| Changed last:   | 17-02-2025  |
| Type:           | Overig  |
| ETIM Group:     | EG000027 - Luminaires   |
| ETIM Classes:   | EC001744 - Downlight/spot/floodlight  |
| Synonym:        | Building site lighting luminaire, Downlight, Downlight/spot/floodlight, Floodlight, Light-track luminaire, Light-track spot, Projector, Spot, Spot luminaire/floodlight |

## Feature

|  |                      |  |                  |
|--|----------------------|--|------------------|
| Suitable for surface mounting:             | No                   | Reflector:   | High-gloss       |
| Suitable for built-in mounting:            | Yes                  | Beam angle:  | Wide beam 41-80° |
| Suitable for wall mounting:                | No                   | Light outlet:  | Direct           |
| Suitable for suspended mounting:           | No                   | Energy efficiency class:   | A+               |
| Suitable for ceiling mounting:             | No                   | Energy efficiency class of the built-in lamp:                                    | A+               |
| Suitable for traverse mounting:            | No                   | Rated life time L70/B50 at 25 °C:  | 70000 h          |
| Suitable for pedestal/floor mounting:      | No                   | Rated life time L80/B10 at 25 °C:  | 0 h              |
| Suitable for light-track mounting:         | No                   | Lumen maintenance at median useful life of 35,000 h at 25 °C ambient (tq):       | 0 %              |
| Suitable for clamp-mounting:               | No                   | Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq):       | 0 %              |
| Suitable for low voltage cable system:     | No                   | Lumen maintenance at median useful life of 100,000 h at 25 °C ambient (tq):      | 0 %              |
| Adjustability:                             | Not adjustable       | Failure rate at median useful life of 35,000 h at 25 °C ambient (tq):            | 0 %              |
| With movement sensor:                      | No                   | Failure rate at median useful life of 50,000 h at 25 °C ambient (tq):            | 0 %              |
| With light sensor:                         | No                   | Failure rate at median useful life of 100,000 h at 25 °C ambient (tq):           | 0 %              |
| Lamp type:                                 | LED not exchangeable | Constant light output (CLO):   | No               |
| With light source:                         | Yes                  | Rated ambient temperature according to IEC 62722-2-1:                            | 0 ~ 0 °C         |
| Lamp holder:                               | None                 | Suitable for lamp power:   | 33 ~ 33 W        |
| Housing material:                          | Aluminium            | Max. system power:   | 33 W             |
| Surface protection:                        | Plastic-coated       | Colour of light:   | White            |
| Housing colour:                            | White                | Colour temperature:  | 3000 ~ 3000 K    |
| Material cover:                            | Glass transparent    | Luminous flux:   | 0 ~ 0 lm         |
| Surface brushed:                           | No                   | Rated luminous flux according to IEC 62722-2-1:                                  | 0 lm             |
| Nominal voltage:                           | 220 ~ 240 V          | Luminous intensity:  | 0 cd             |
| LED nominal current at constant current:   | 0 ~ 0 mA             | Colour of light adjustable:  | No               |
| With control gear:                         | Yes                  | Luminous flux adjustable:  | No               |
| Exchangeable control gear:                 | No                   | Beam angle adjustable:   | No               |
| Dimming depending on control gear:         | No                   | Width:   | 228 mm           |
| Dimming 0-10 V:                            | No                   | Height/depth:  | 99 mm            |
| Dimming 1-10 V:                            | No                   | Length:  | 228 mm           |
| Dimming DALI-2:                            | No                   | Outer diameter:  | 228 mm           |
| Dimming DALI:                              | No                   | Built-in width:  | 210 mm           |
| Dimming DMX:                               | No                   | Built-in height/depth:   | 100 mm           |
| Dimming DSI:                               | No                   | Built-in length:   | 210 mm           |
| Dimming potentiometer (integrated):        | No                   | Built-in diameter:   | 210 ~ 210 mm     |
| Dimming GPRS:                              | No                   | Conductor cross section:   | 0 mm²            |
| Dimming LineSwitch:                        | No                   | Connectable conductor cross section:   | 0 ~ 0 mm²        |
| Dimming manufacturer's proprietary system: | No                   | Connection type:   | Other            |
| Dimming mains voltage modulation:          | No                   | Luminaire with limited surface temperature, sign "D" according to EN 60598-2-24: | No               |
| Dimming phase cut-off:                     | No                   | Emergency power supply integrated:   | No               |
| Dimming phase cut-on:                      | No                   | Luminaire efficacy:  | 0 lm/W           |
| Dimming programmable:                      | No                   | Suitable for workplace according to EN 12464-1:                                  | No               |
| Dimming RF:                                | No                   | Covering of the luminaire with thermally insulating material possible:           | No               |
| Dimming Sine Wave Reduction:               | No                   | IFTTT support available:   | No               |
| Dimming Touch and Dim:                     | No                   | Compatible with Apple HomeKit:   | No               |
| Dimming Zigbee:                            | No                   | Compatible with Google Assistant:  | No               |

Dimming with push-button: No

Compatible with Amazon Alexa: No

No dim function: No

### Packaging data

Weight 0 gr

Customs code 94051098